

TRACK AND ACCESSORIES



HOISTING SOLUTIONS



MODELS:
130KGS
160KGS
200KGS
270KGS

SPECIFICATION

MAX SAFE WORKING LOAD: 130KGS, 160KGS, 200KGS, 270KGS.

APPROX NUMBER OF LIFTS BEFORE RECHARGE:
WITH 85 KG LOAD APPROX 65

CHARGING TIME: 8HOURS MAX

UNIT WEIGHT INC BATTERIES:
MANUAL: 9.7KGS
DRIVE: 10.4KGS

LIFTING SPEED:
LOADED 0.15M/S; UNLOADED 0.25M/S

BATTERIES: 2 X 12V 5AMP
BATTERY PROTECTION: SLEEP MODE
VOLTAGE 24VDC

TRANSFORMER : 1P 67 RATED
30V AC OUTPUT
230V AC INPUT
50/60MHZ

ASK ABOUT
OUR OTHER
PRODUCTS

MOBILE HOISTS
SHOWER/TOILET/COMMODE CHAIRS
SHOWER STRETCHERS AND TROLLEYS
MOVING AND HANDLING EQUIPMENT

SLINGS
ASSISTED BATHS
BEDS
WASH AND DRY WCS



WESTHOLME
A PRISM MEDICAL COMPANY



NEWCOMBE STREET, ELLAND, WEST YORKSHIRE. HX5 0EG T: 01422 260011 F: 01422 371783 WWW.WESTHOLME.CO.UK

transactive™
tra



WESTHOLME
A PRISM MEDICAL COMPANY

QUALITY • SERVICE • VALUE

TRANSACTIVE XTRA

THE COMPACT HOIST WITH EXTRA FEATURES...

INSTALLATION SOLUTIONS

...AND A TRACKING SYSTEM FOR EVERY SITUATION

WESTHOLME

is proud to present the all new Transactive Xtra, a product of world class design and state of the art features providing safe reliable and effective hoisting for carers and users alike. Together with the extensive range of track configurations, Westholme and the Transactive Xtra can provide the perfect solution to your hoisting requirements

- **Slimline but with great lifting capacity**
- **Low profile hoist unit is unobtrusive and provides greater lifting height**
- **Soft start/stop ensures smooth operation for user**
- **A host of safety features.**
- **Smooth running tape with large lifting range**
- **State of the art display with lift counter**

Slimline low profile padded carry bar has six sling loop attachment points as standard (four hook as option) different width carry bars available

Ergonomically designed handset with hold to run clearly marked buttons and directional arrows requires minimum pressure to operate. Pneumatically controlled, it is therefore safe for use with wet hands.




Fire retardant cover completely encapsulates hoist

Neat in track transformer IP 67 rated

Coloured Direction indicators on hoist unit that match hand control ensure correct operation first time


Emergency stop and electric emergency window

**130kgs, 160kgs, 200kgs, 270kgs
MODELS AVAILABLE**

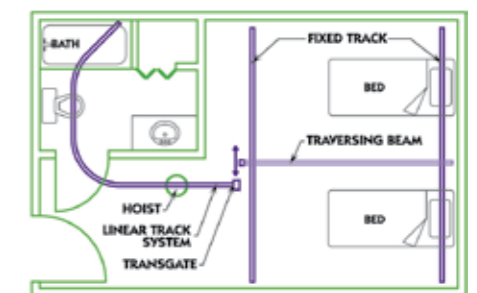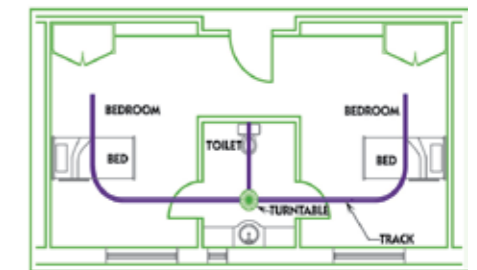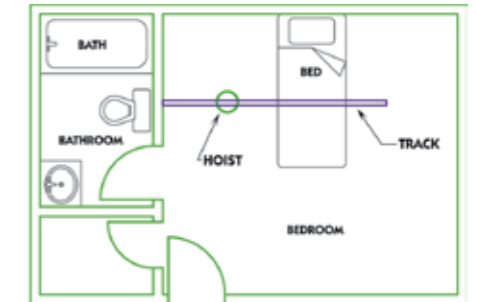


State of the art Display provides essential information for the user carer and engineer:

- Lift counter
- Displays operation being carried out (UP, DOWN, TRAVERSE etc)
- Charge level of battery • Low battery indicator (visual and auidal)
- On charge indicator • Return to charge (Option)
- Diagnostic feature for transactive engineer to aid maintenance and repair

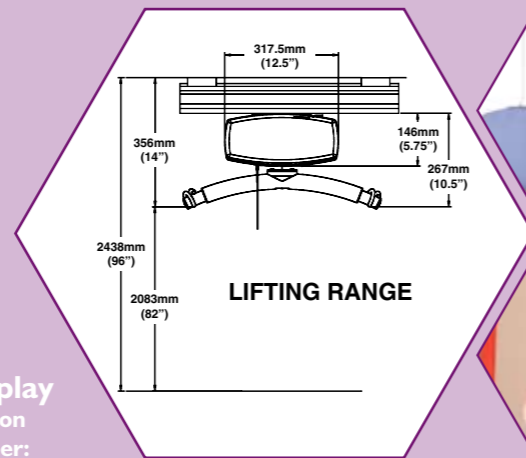

Manual window AND RAISING.

This feature is unique to Freeway and allows the hoist to continue to be used until the engineer arrives. This provides peace of mind and security to carer and user.

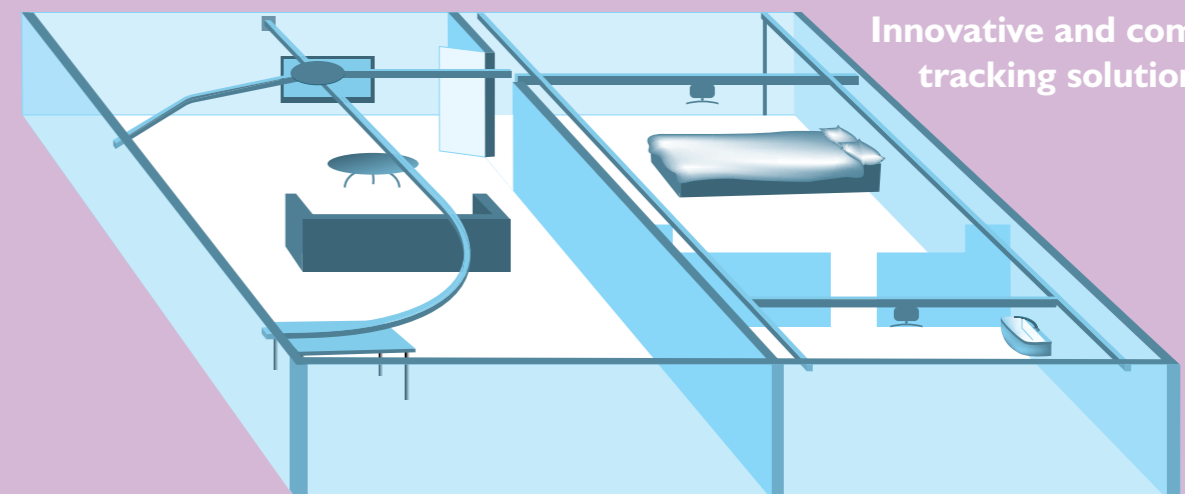

Innovative and complete tracking solutions