

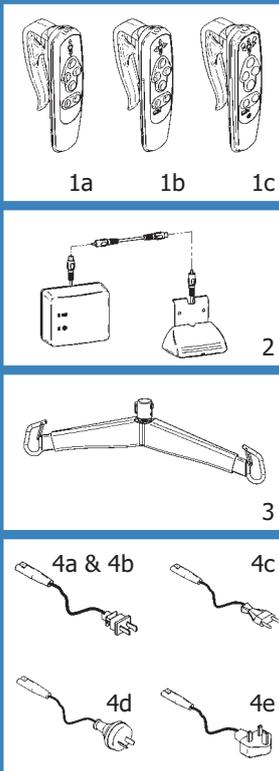
Ceiling Lift - Fixed

V4

# PRODUCT	DESCRIPTION	MARKET
#9100001	V4 / 4 Way - KWIKtrak	NORTH AMERICA
#9100004	V4 / 4 Way - KWIKtrak	AUSTRALIA
#9100008	V4 / 4 Way - KWIKtrak	EUROPE & UNITED KINGDOM
#9100029	V4 / 4 Way - KWIKtrak - Wireless (I.R. remote)	ALL MARKETS
#9101001	V4 / 4 Way - BHM Track	NORTH AMERICA
#9100209	V4 / 2 Way - KWIKtrak	ALL MARKETS



Lifting capacity :
440 lb / 200 kg / 31.49 st



√ = Included / O = Optional

# PART	DESCRIPTION	#9100001	#9100004	#9100008	#9100029	#9101001	#9100209
1a #700.13600	Hand Control - 2 Way						√
1b #700.13650	Hand Control - 4 Way	√	√	√	√	√	
1c #700.13640	Hand Control - Wireless (I.R. Remote)				√		
2 #700.15500	Charging Station - KWIKtrak	√	√	√	√		√
2 #700.15507	Charging Station - BHM Track					√	
2 #700.15505	Center Track Charger - BHM Track					O	
3 #700.05490	Carry Bar	√	√	√	√	√	√
4a #402.00001	Charger Power Cord - North America	√			√	√	√
4b #402.00002	Charger Power Cord - Japan				√		√
4c #402.00003	Charger Power Cord - Europe			√	√		√
4d #402.00004	Charger Power Cord - Australia		√		√		√
4e #402.00005	Charger Power Cord - United Kingdom			√	√		√

SUGGESTED SLINGS & STRETCHERS	Hammock & Hammock 6	Hygienic	Quick Fit	Band	Chest	Total transfer	Combi	Repositioning	Bariatric	Walking	Soft	Universal	Morgue
	Slings										Stretchers		
	√	√	√				√	√	√	√	√		√

(For more details, look into the Sling Section)

FEATURES

Weight	12.7 kg / 28 lb / 2 st
Lifting capacity	200 kg / 440 lb / 31.49 st
Soft start & stop movement	
Return to charge function on handset	Lift cannot return to charger with load

SAFETY FEATURES

Emergency lowering device	Manual & electric
Emergency brake	Prevent free fall
Emergency Stop Pull Cord	

TECHNICAL SPECIFICATIONS

CSA, UL & CE approved	
Vertical displacement speed	6 cm/sec (2.4 in/sec) at 200 kg / 440 lb / 31.49 st
Horizontal displacement speed - Programmable	10, 15, 20 or 25 cm/sec (3.9, 5.9, 7.9 or 9.8 in/sec) Default : 20 cm/sec (7.9 in/sec)

BATTERY SPECIFICATIONS

Rechargeable sealed lead acid	(2X) 12VDC, 5Ah
Side rail mounting, position anywhere, charging system	
Battery capacity with load of 91 kg / 200 lb / 14.33 st	Up to 120 transfers
Low battery warning indicator - Visual & audible	
Charger input – 90-240 Vac, 50-60 Hz, 27 VA max.	
Charge indicator - Visual	

STRAP SPECIFICATIONS

Length	2.3 m (90½ in)
Automatically stops unit if twisted	
Tested for 2727 kg / 6000 lb / 429.4 st	

UNIT CONSTRUCTION

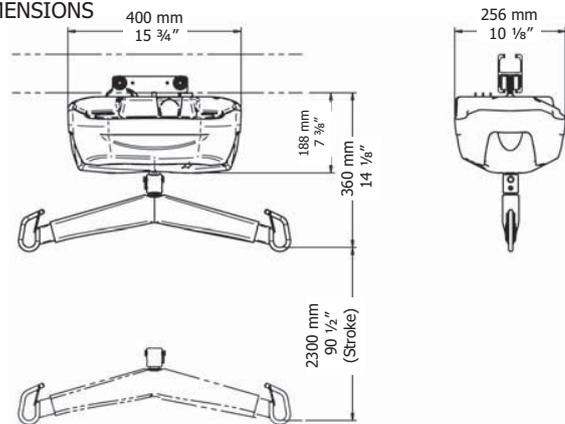
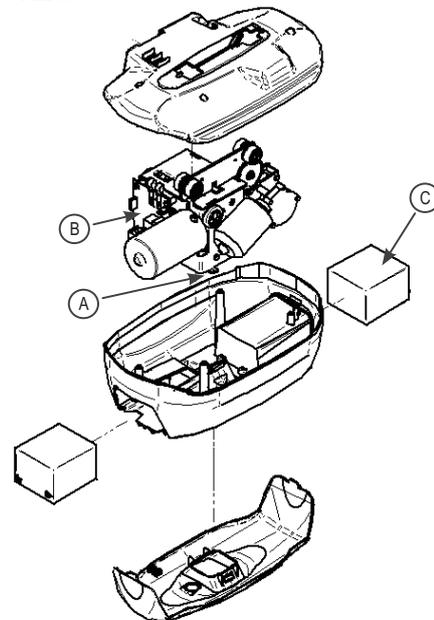


Frame – high strength rolled steel zinc plated	
Cab – fire retardant plastic	

COMMON SPARE PARTS

A	#362.14000	V4 - Strap
B	#492.00035-1	V4 (440 lb) Main Board
C	#403.10500 (X2)	Battery

ACCESSORIES

D	#402.15505	Charger extension - 2 m (78 in)
E1	#700.00510	Scale Unit (North America, Japan, & Australia)
E2	#700.00530	Scale Unit - Class III (Europe & United Kingdom)

DIMENSIONS

EXPLODED VIEW

ACCESSORIES


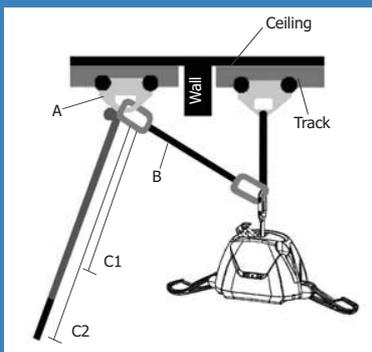




Ceiling Lift - Portable

V3

Lifting capacity :
440 lb / 200 kg / 31.49 st

# PRODUCT	DESCRIPTION	MARKET
#9810001	V3 / 2 Way - Portable Lift	NORTH AMERICA
#9810008	V3 / 2 Way - Portable Lift	EUROPE & UNITED KINGDOM



√ = Included / O = Optional

# PART	DESCRIPTION	#9810001	#9810008
1	#700.13600 Hand Control - 2 Way	√	√
2	#700.13510 Charger	√	√
3a	#402.00001 Charger Power Cord - North America	√	
3b	#402.00003 Charger Power Cord - Europe		√
3c	#402.00005 Charger Power Cord - United Kingdom		√
4	#005.16500 V3 - Emergency Lowering Tool	√	√

√ = Included / O = Optional

# PART	DESCRIPTION	#9810001	#9810008
DOOR HEADER PASS THROUGH COMPONENTS			
A	#700.10650 Trolley - KWIKtrak		O
A	#A5900 Trolley - BHM		O
A	#700.10655 Trolley - Goldman		O
A	#700.10640 Trolley - Techno, Liko & Marka		O
B	#700.03715 Adjustable extension strap - Black		O
C1	#700.08310 Reacher 61 cm / 24"		O
C2	#700.08320 Reacher 91 cm / 36"		O

SUGGESTED SLINGS & STRETCHERS	Hammock & Hammock 6	Hygienic	Quick Fit	Bend	Chest	Total transfer	Combi	Repositioning	Bariatric	Walking	Soft	Universal	Morgue
	Slings										Stretchers		
	√	√	√					√	√				

(For more details, look into the Sling Section)

FEATURES

Weight	6.35 kg / 14 lb / 1 st
Lifting capacity	200 kg / 440 lb / 31.49 st
Soft start & stop movement	

SAFETY FEATURES

Emergency lowering device	Manual
Emergency brake	Prevent free fall
Current limiter & emergency stopping device	

TECHNICAL SPECIFICATIONS

CSA, UL & CE approved	
Vertical displacement speed	4.3 cm/sec (1.7 in/sec)

BATTERY SPECIFICATIONS

Rechargeable sealed lead acid	(2X) 12VDC, 2.3Ah
Intelligent & fast charging system	2 to 4 hrs for complete charge
Battery capacity with load of 80 kg / 180 lb / 12.6 st	Up to 30 transfers
Low battery disconnect system	Protect batteries from been drained
Charge input – 90-240 Vac, 50-60 Hz, 27VA max.	
Charge indicator - Visual	

STRAP SPECIFICATIONS

Length	2.2 m (88 in)
Automatically stops unit if twisted	
Tested for 1363.5 kg / 3000 lb / 214.8 st	

UNIT CONSTRUCTION

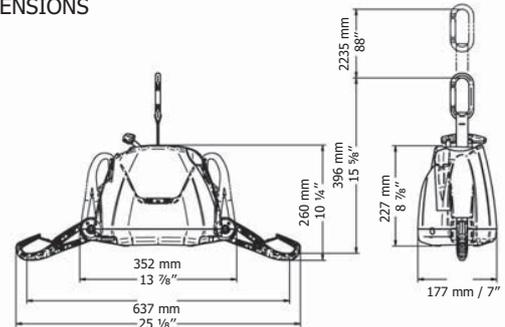
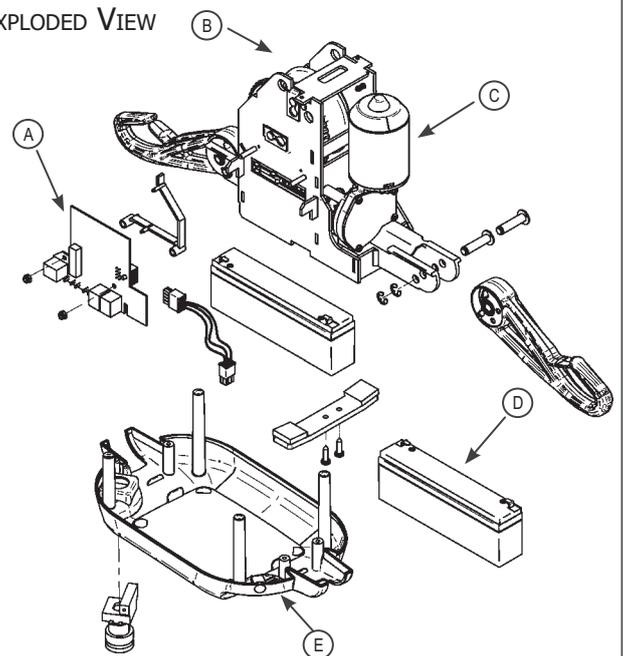
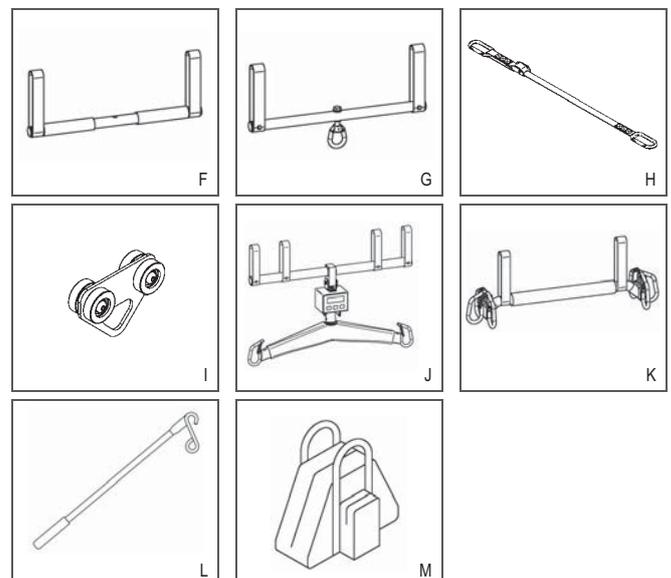
Frame – high strength rolled steel zinc plated	
Cab – fire retardant plastic	

COMMON SPARE PARTS

A	#492.00047-1	V3 - Main Circuit Board
B	#362.01365	Strap
C	#E0006	Gear motor
D	#E6585 (2X)	Battery
E	#492.00051	Handset - Charger input circuit board

TRACK LIFT ACCESSORIES

F	#A5720	Trapeze
G	#A5710	Trapeze with hook 41 cm (16 in)
H	#700.03715	Adjustable extension strap - Black
I	#A5900	Trolley - BHM Track
I	#700.10650	Trolley - KWIKtrak
J	#700.05720	Weighing unit & Adapter (North America)
K	#700.05740	Spreader bar
L	#700.08310	Reacher 61 cm (24 in)
L	#700.08320	Reacher 91 cm (36 in)
M	#002.08150	Portable lift carry bag

DIMENSIONS

EXPLODED VIEW

ACCESSORIES




BHM

Because Health Matters

Setting new standards for

- Convenience
- Safety
- Lifting capacity
- Aesthetics
- Ease of installation

with the next generation in track lifts





V4

Our new V4 ceiling track lift combines many of the trusted features of the successful Voyager series along with design improvements and new features you asked for! The NEW V4 is the most technologically advanced track lift on the market today.

- Use the handset to program lateral speeds and the carry bars position after the return to charge function is complete.
- Power emergency up & down along with an easily accessible manual emergency down compliment the safety design features.
- The clip on charging station can be placed at any convenient location along the track.
- An ergonomically designed handset provides 2 or 4 way function plus return to charge, a wireless remote is available.
- The unique lift powered turntable and track exchanger systems add unparalleled versatility.

V3

Our new V3 portable track lift combines a solidly engineered design with features you would never expect to find in a portable. Its compact size, folding sling hooks and integrated carry handle make the NEW V3 a breeze to move from room to room.

- The V3 weighs in at only 6.5 kg. (14 lbs).
- Room to room transfers can be accomplished using the swing bar.
- Wide set sling hooks allow a more comfortable transfer for the patient.
- An ergonomically designed handset and secondary controls mounted on the lift provide real convenience for the care provider.
- When it's time to charge the V3 simply plug it into the nearest outlet- the charger has been integrated into the lift.

THE V4 & V3 SET A NEW STANDARD FOR EASY MAINTENANCE:

- Maintenance light tells you when the lift needs service- no more guesswork!
- Modular design: components that require service simply snap out and in.
- Lightweight construction: moving or removing either lift is easy while the lifting capacity of 200 kg (440 lbs) (31.5 st) remains the same for both lifts

BOTH ARE DESIGNED FOR KWIKtrak - THE NEW STANDARD IN RAIL SYSTEMS:

- Uses a revolutionary patented bracket that is 40% faster to install than conventional brackets. Its unique locking device keeps the track securely fastened.
- KWIKtrak's slim design permits a tight 595 mm (23 in.) turning radius on curves.
- Smooth, seamless joints using a unique pin locking system improves lateral movement and finished appearance.



ERGONOMICALLY
DESIGNED HANDSET