



Wessex HomeLift

domestic through floor lift

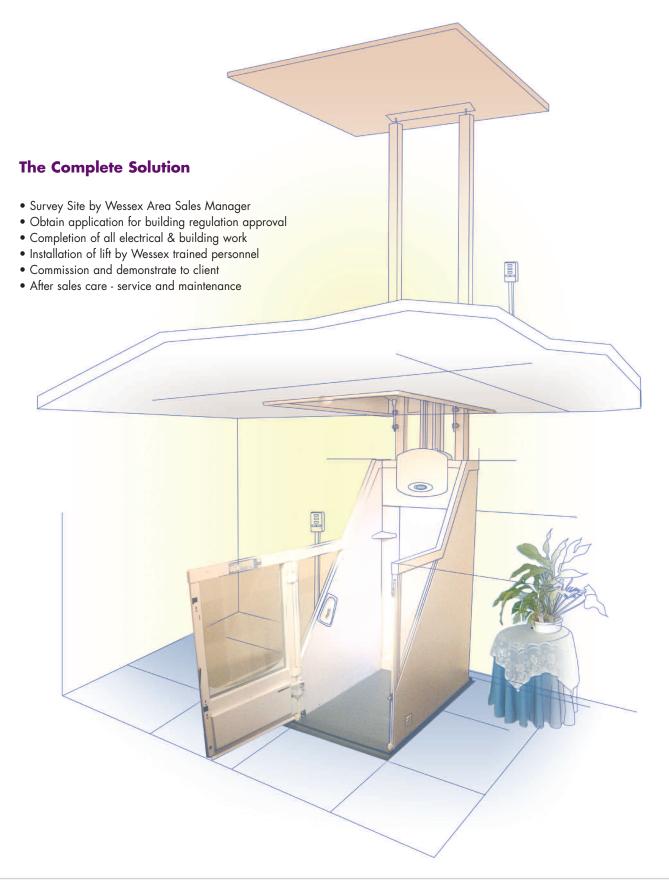

STANDARD SPECIFICATION	VM30	VM31	VM36	VM50	VM51	VM56
Standard Seated Lifts	V	-	-	~	-	-
Standard Wheelchair Lifts	-	V	-	-	~	-
Large Wheelchair Lifts	-	-	~	-	-	~
3m Maximum Travel	V	V	~	-	-	-
3.5m Maximum Travel	-	-	-	~	~	~
Internal width	590	740	790	590	740	790
Internal length - Manual Door	790	1180	1230	790	1180	1230
Total external length with door open to wall	1655	2190	2290	1655	2190	2290
Total external width including floating platform	722	872	922	722	872	922
Total external length including floating platform to wall 📵	1090	1475	1525	1090	1475	1525
Minimum shaft width	846	996	1046	846	996	1046
Minimum shaft length	1120	1505	1555	1120	1505	1555
Minimum first-floor ceiling height	2040			2280		
Mid-floor dimensions	from 165mm to 300mm			from 165mm to 300mm		
Safe working load	225kg			225kg		
Lift speed	60mm per second			60mm per second		
Ramp gradient	1.8			1.8		
Door adjustment	up to 95 degrees			up to 95 degrees		
Car control illumination	4 to 20 minute duration			4 to 20 minute duration		

Note: Addition of power door to wheelchair models reduces internal length by 30mm. Power door not available on seated models.

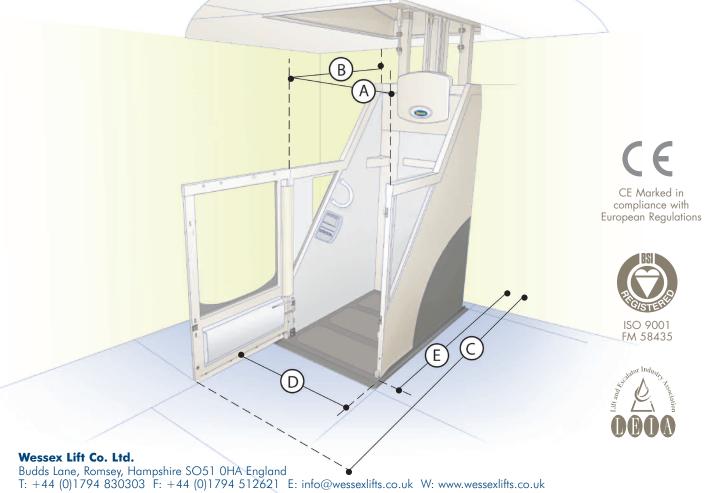

A member of the Ratcliff Group

Registered Office: Bessemer Road, Welwyn Garden City, Hertfordshire, AL7 1ET Registered Number: 1269836 VAT Number: 190 0689 57