



Stature™

It's important when Stature counts



OXFORD®

INNOVATE.
BUILD FOR THE FUTURE

Outstanding
all-round performer


Stature

The 'Stature' patient lift, Oxford's flagship product, recognises the true needs of the modern care environment. With a massive safe working load of 227kgs/500lbs/36st and one of the largest lifting ranges available (min 390mm max 1550mm), the Stature is able to cope with even the most demanding and technical of patient handling situations.



Cradle: The Stature's 4-point positioning cradle enables the carer to position the patient perfectly, simply by rotating the cradle (and patient) into either a fully seated or reclined orientation. This flexibility ensures the patient is comfortably transferred and requires little or no additional repositioning.

Sling safety: With Oxford's unique 'Securiz' sling attachment system you can be assured that patient safety is not compromised. The Securiz system ensures that no inadvertent detachment occurs, once the sling clip has been attached to the cradle. This guarantees that each transfer will be achieved safely and efficiently - 100% of the time.

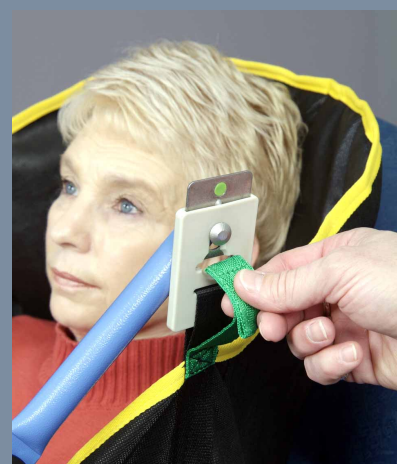


Interchangeable spreader bar: Like all Oxford Pro passive lifting products, you have the option to choose whichever cradle or spreader bar configuration best suits the needs of the care environment and patient alike. With a wide selection of slings and attachments available, you can be sure to get the right combination each and every time.

Stature

The Stature's incredible lifting range enables it to cope easily with the most critical of daily tasks:

- Chair to chair transfers
- Bed to chair transfers
- Floor to chair transfers
- Chair to bath tub transfers

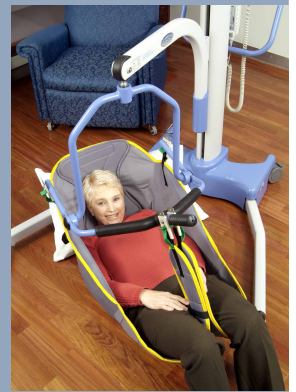

The Stature has many key design features which make it a truly flexible piece of equipment:

Powered base

Opening and closing of the legs is fully automated and leaves the carer free to focus on the requirements of the patient.



Extensive range of accessories

The Stature is available with a number of key accessories, making it both versatile and flexible in use.



The Stature was designed with the 5 key principles of moving and handling in mind. This direct correlation ensures Oxford's lift designs are simple, safe and above all comfortable to use.

- 1 Get close to the load
- 2 Use a wide stable base
- 3 Ensure a comfortable firm grasp
- 4 Keep spine close to neutral
- 5 Make sure movement is smooth

Superior ergonomic design

The Stature enters a new dimension when it comes to usability. Careful attention to product design ensures correct ergonomic usage, protecting both the patient and carer from injury at all times.

This view is shared by our clinical consultant teams, who have assisted us in conducting detailed usability surveys to ensure that the Stature meets the true needs of the patient, the carer and the environment in which it operates.

INNOVATE.
BUILD FOR THE FUTURE

Stature

Oxford Stature Technical Specifications

Specification	Imperial	Metric
Safe Working Load	500 lbs	227 kgs
Maximum Overall Length	54.7 inches	1390 mm
Minimum Overall Length	50.8 inches	1290 mm
Maximum Overall Height	83.8 inches	2130 mm
Minimum Overall Height	76.6 inches	1945 mm
Maximum Height to Attachment Point - 4 Point Cradle	61 inches	1550mm
Minimum Height to Attachment Point - 4 Point Cradle	15.4 inches	390 mm
Maximum Height to Attachment Point - 6 Point Spreader Bar	77.7 inches	1975 mm
Minimum Height to Attachment Point - 6 Point Spreader Bar	26.6 inches	675 mm
Turning Radius	61 inches	1550 mm
Legs Open - External Width	53.5 inches	1360 mm
Legs Open - Internal Width	48.4 inches	1230 mm
Legs Closed - External Width	29.9 inches	760 mm
Legs Closed - Internal Width	25.1 inches	640 mm
Overall Height of Legs	4.3 inches	110 mm
Ground Clearance	1.2 inches	30 mm
Front Twin Castors	4.0 inches	100 mm
Rear Braked Castors	4.0 inches	100 mm

Weights		
Mast, Base & Boom Assembly	142 lbs	64.5 kgs
4 Point Positioning Cradle	13.2 lbs	6 kgs
Power Pack	6.6 lbs	3 kgs
Total	162 lbs	73.5 kgs

Specifications may vary due to manufacturing tolerances

Electrical Specifications

Battery 1 X 12 volt rechargeable sealed lead acid type
 Battery capacity 3.2 Ampere hours
 Charger rated input 230Vac 50/60Hz
 Charger rated output 27.4/29.0 VDC@0.8A

Electrical Shock Protection

Charger - class II
 Lift - internal power source

Degree of shock protection
 Charger - Type B
 Lift - Type B
 Intended operating environment : >+5° <+40°
 Outside this environment functionality and safety may be compromised

Warranty

The Stature comes with a 2 year warranty as standard.
 Please refer to your user manual for further information.



KNOWLEDGE FOR THE FUTURE



Sunrise Medical Limited
 High Street, Wollaston, Stourbridge
 West Midlands, DY8 4PS
 England
 Phone +44 (0)1384 446622
 Fax +44 (0)1384 446644
 www.sunrisemedical.com



2005 Sunrise Medical
 0106/000468101.UK/CJ
 Rev. A

INNOVATE.
 BUILD FOR THE FUTURE